


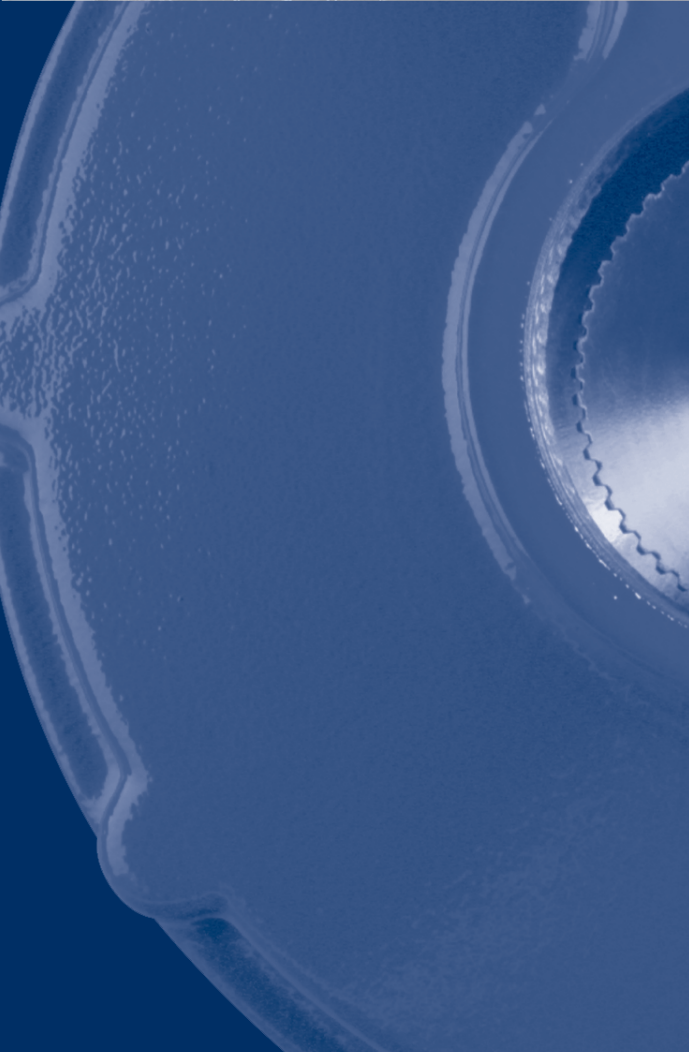
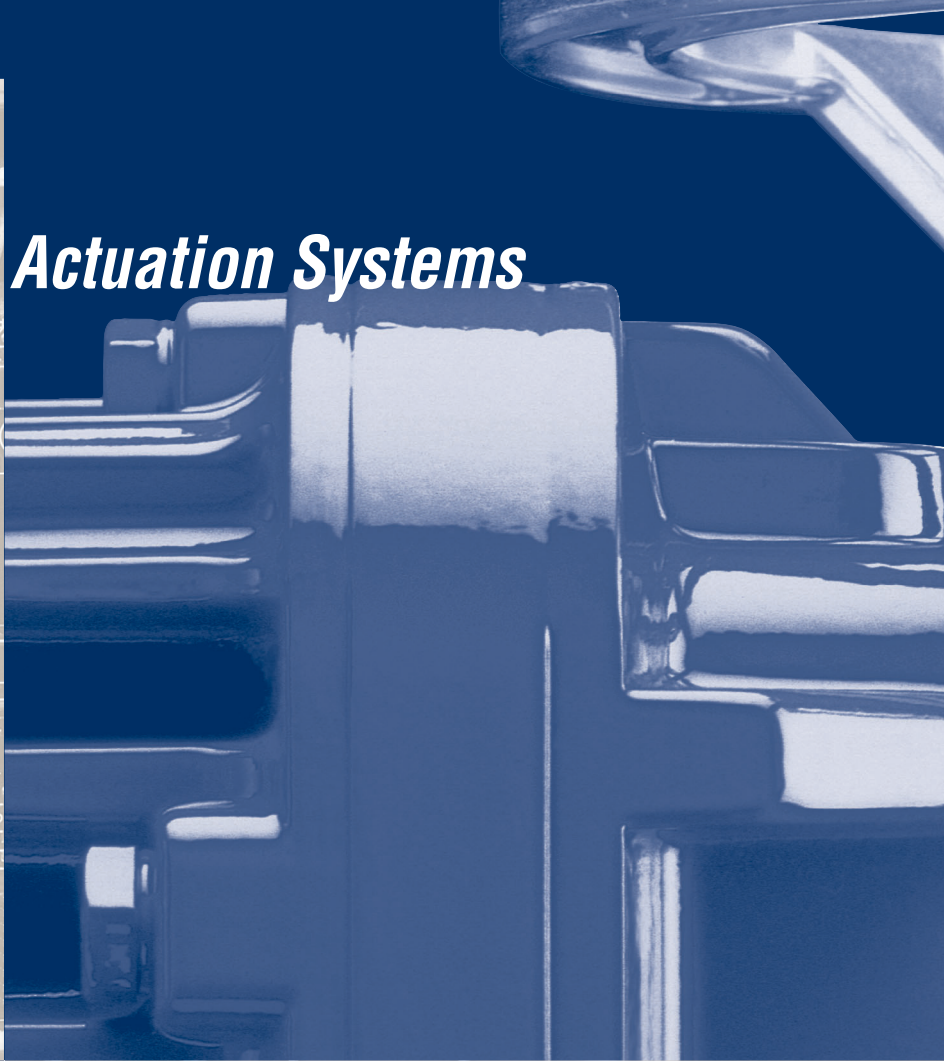
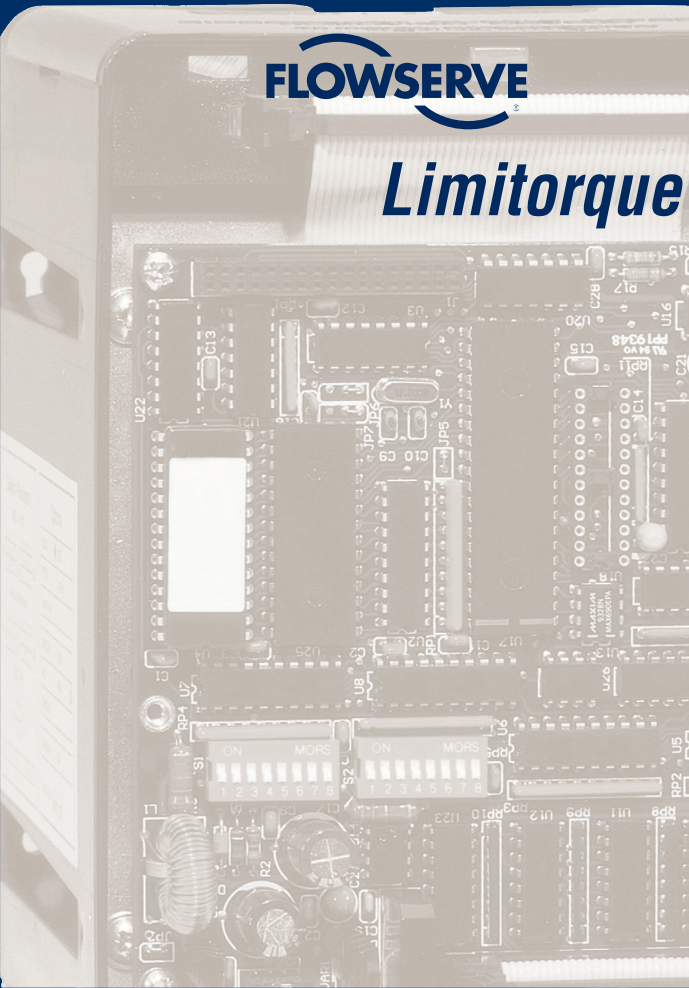
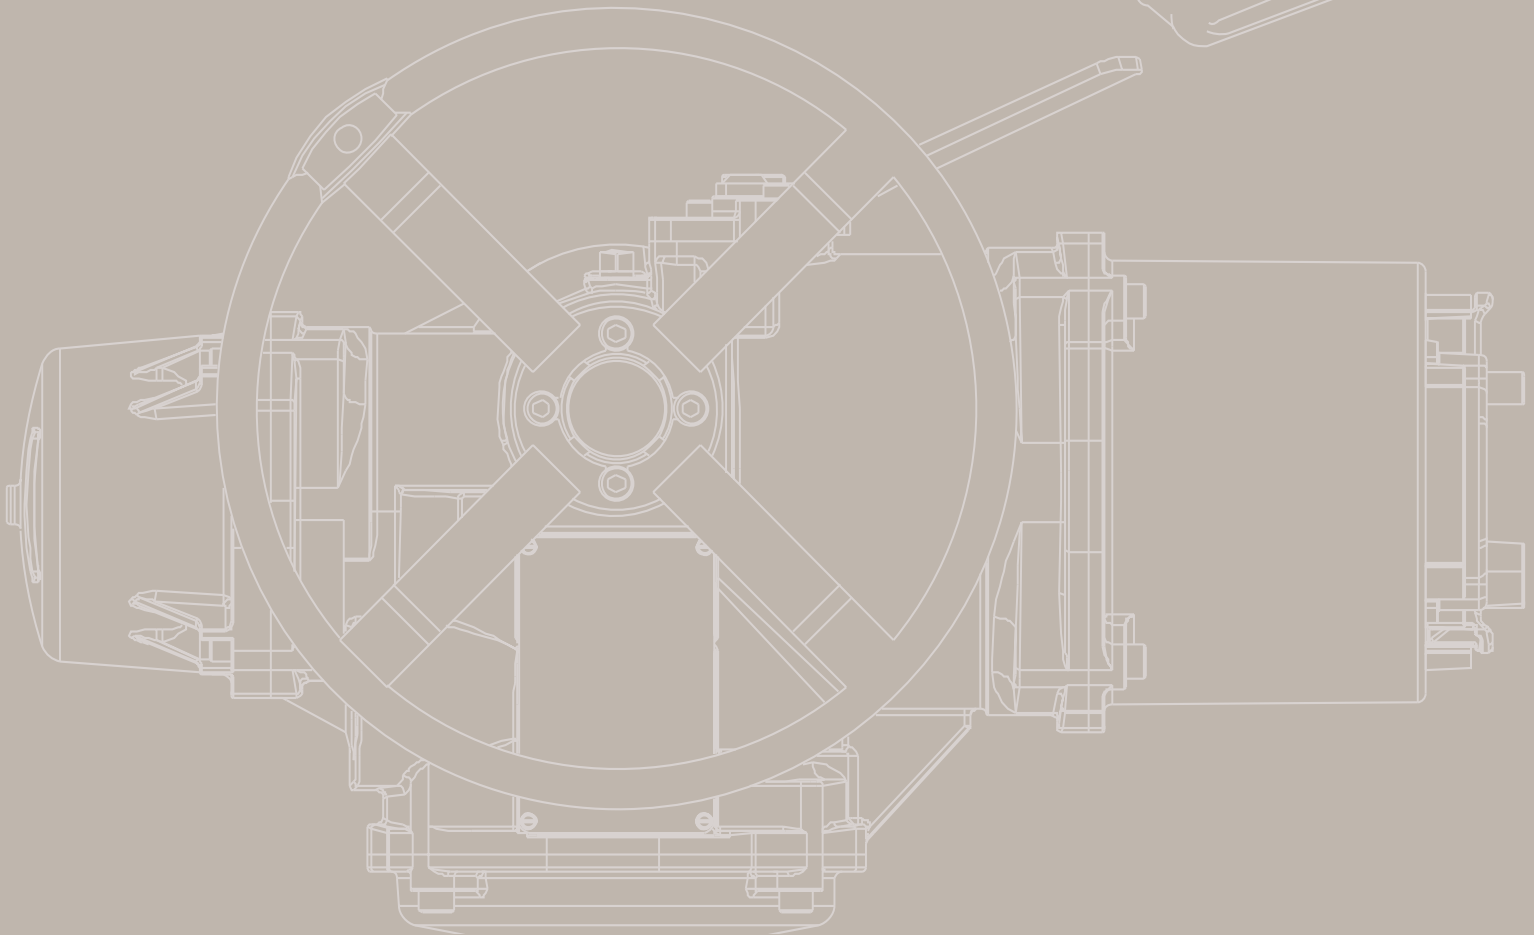
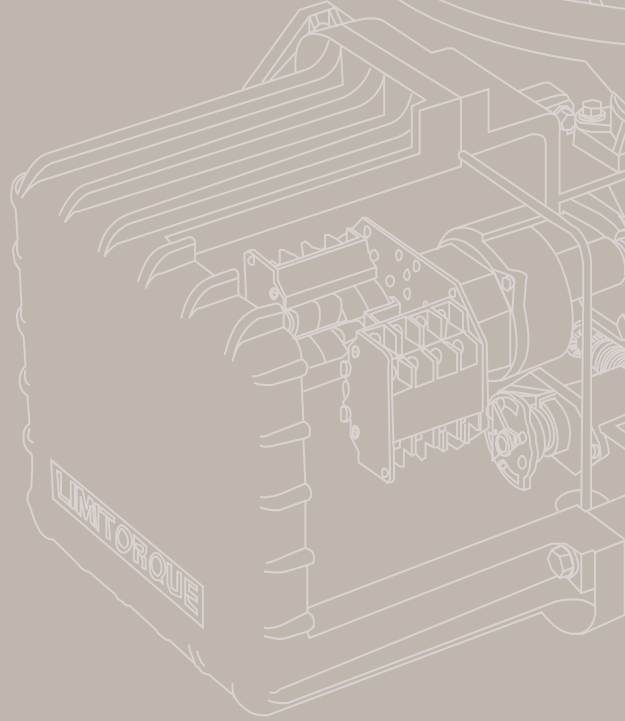


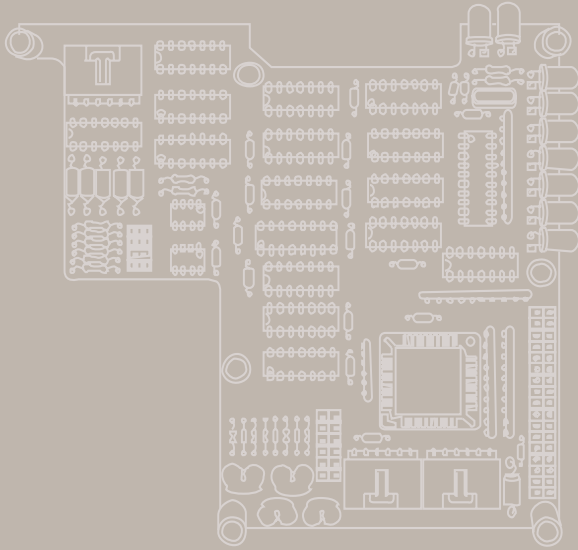


Limitorque Actuation Systems

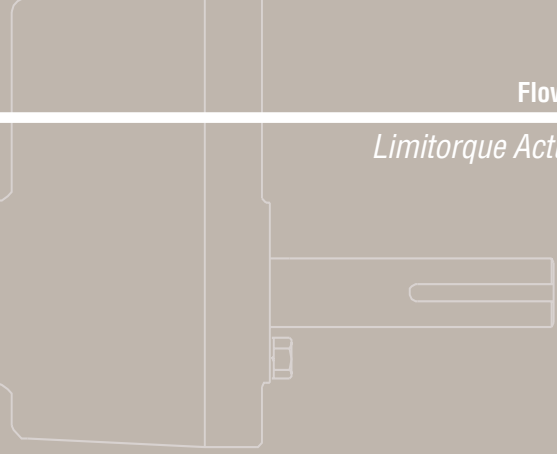

Valve actuators and control systems that make valve control easier

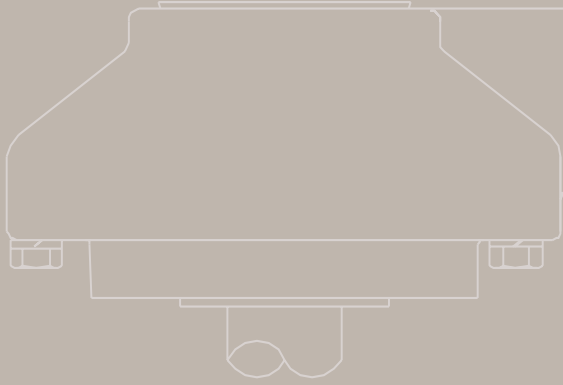

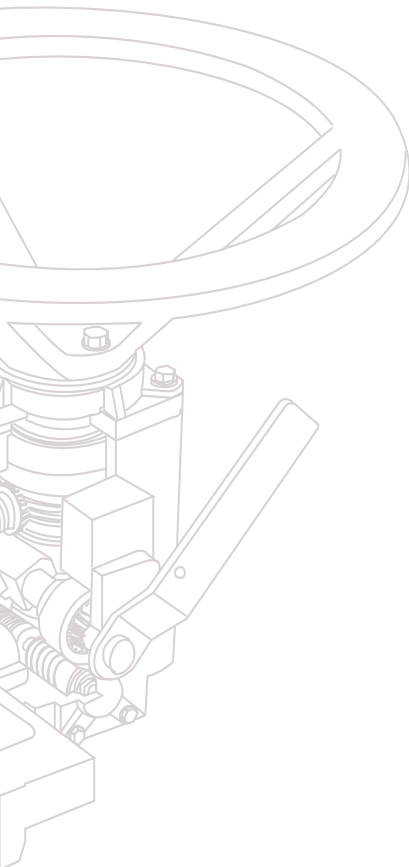

Limatorque products help make valve control easier...



in ways as diverse as the applications in which they're used. Whether you need an actuator with the strength to handle a half-million foot-pounds of thrust, or a sophisticated control network to precisely orchestrate hundreds of valves, you'll



find Limatorque products make the task easier. After nearly three-quarters of a century of experience in the field of valve control, Limatorque understands the particular needs of customers in every major facet of industry.

Limatorque actuators are at work in more than 100,000

sites around the world, reliably automating valves in some of the harshest conditions imaginable: from scorching desert sands to frozen tundra, from rainforest humidity to the stormy salt spray of offshore oil rigs. Automating industrial valves can help increase safety, raise productivity, and reduce operating costs. You can rely on Limatorque for extraordinary valve control.

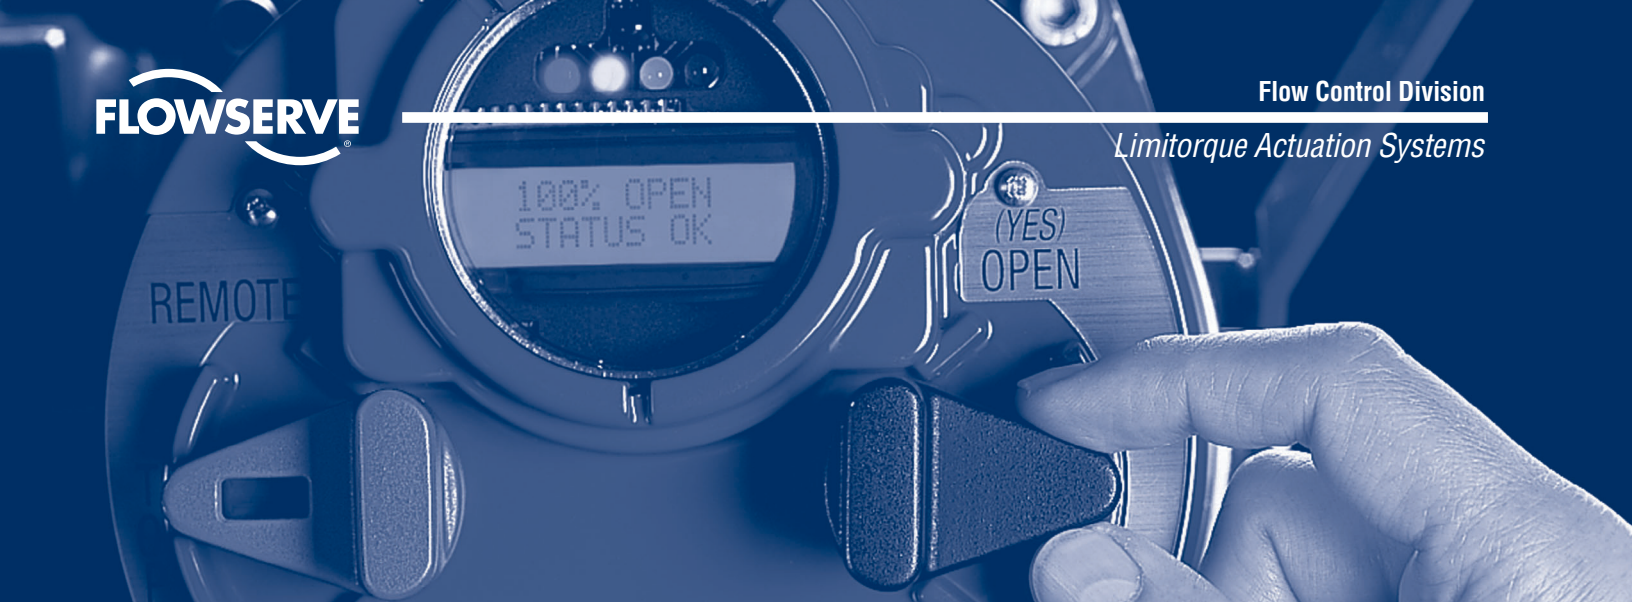

Accutronix MX Multi-turn Actuator

Valve control is easier than ever with high-tech, high-performance Accutronix MX multi-turn actuators, available with Modbus, Foundation Fieldbus, and Profibus DP or PA Network Protocols.


A 32-character LCD display provides easy-to-read actuator status, diagnostics, and setup information in the user's own language. This display works with local control switches to make commissioning and calibration quick and easy—and also enables the user to open, stop, and close the actuator and to select local or remote preferences.

The MX also offers unsurpassed accuracy with a 100%-repeatable absolute encoder, which provides optical sensing of valve position with 15-bit resolution and requires no battery.

Exclusive LimiGard™ internal monitoring circuitry ensures reliability. And the unit's double-sealed terminal chamber is separate from the control chamber, so operators have easy access to the terminal block without exposing control components to dust and moisture.

The Accutronix MX meets or exceeds all relevant specifications of major U.S. and international standards. It's also tested and certified for demanding environmental and operational conditions, including temperature extremes (to -50°C), electromagnetic interference, corrosive atmospheres, and XP environments.

| Torque | | Thrust | | Output Speed |
|---------|---------|------------|--------|--------------|
| ft-lb | N m | lb. | kN | RPM |
| 55-1700 | 75-2306 | 8000-75000 | 35-330 | 15-200 |

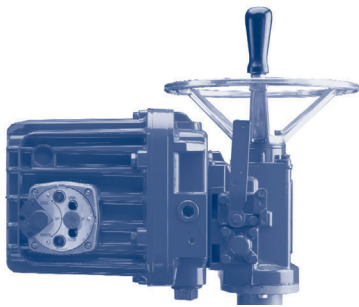

L120 Multi-turn Actuator


The L120 is a proven choice for any valve requiring either rotary or linear power. Whether gate or globe valves, sluice gates or pen stocks, the L120 performs reliably in any situation demanding positive, dependable actuation.

It can be used without modification with any rising or non-rising stem for linear-action valves. When combined with a Limitorque WTR-series quarter-turn gear operator, the L120 can be used to control butterfly, ball, and plug valves, as well as damper drives, flop gates, or any other device that requires 90° movement. L120 units can also be coupled with other gearheads such as Limitorque's HBC or B320 units for motorized operation of valves requiring increased torque and/or thrust.

The L120 is factory-lubricated and weatherproofed for service in temperatures ranging from -50°F to 150°F. Submersible and explosionproof versions are available. Weatherproof enclosures meet NEMA 1, 11, 4 and 6 standards, as well as IP68. Integral controls with printed board circuitry and plug-in modules are also available.

| Torque | | Thrust | | Output Speed |
|----------|----------|--------------|---------|--------------|
| ft-lb | N m | lb. | kN | RPM |
| 50-60000 | 68-81600 | 10000-500000 | 44-2224 | 12-250 |

LY Quarter-turn Actuator




The LY Series actuators provide quarter-turn valve and damper operation in a compact, light-weight, and easy-to-mount unit. The LY incorporates mechanical adjustable stops for 90° rotation with ±10° adjustment, and can easily be modified for rotation of up to 360°. It requires no motor brakes or complex locking mechanisms.

Standard features include steel-on-bronze worm gear sets, anti-friction bearings throughout, and durable epoxy coating. Torque switches are interchangeable, double-acting, and fully adjustable. Declutch levers allow safe handwheel operation. Control compartment heaters prevent corrosion damage due to moisture caused by condensation. Motors can be three-phase or single-phase, and are thermally protected with class-F insulation.

LY units meet all AWWA C504-87 and C540-93 requirements, and are available in submersible, weatherproof, or explosionproof configurations. Integral controls with printed board circuitry and plug-in modules are also available.

| Torque | | Operating Time |
|----------|----------|----------------|
| ft-lb | N m | Seconds |
| 200–1200 | 271–1627 | 15–60 |

DDC-100 Valve Control Network

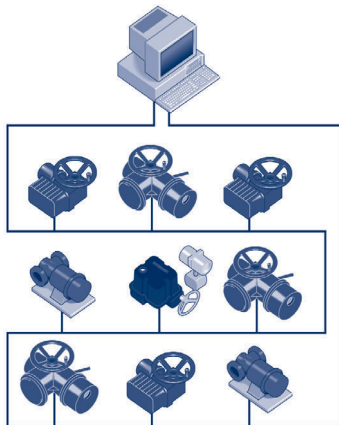


The DDC-100 valve-control network efficiently connects as many as 250 valve actuators directly to an existing host system without adding hardware or new equipment. The network’s design also reduces the costs of engineering, cable, and installation.

With a simple and reliable communications path between the host system and the network, actuators and other devices (such as pumps and solenoids) can be efficiently automated and monitored from a central control room.

The system’s open architecture is compatible with affordable Modbus protocols and communication standards, and is easily expanded to include Accutronix MX, UEC and DDC units. Limitorque’s partnerships with host suppliers ensure that connection and programming can be smoothly accomplished with minimal equipment, effort, and cost.

The “bottom line” is that the Limitorque DDC-100 direct-to-host network simplifies valve operation, enhances control, and reduces costs.

Foundation Fieldbus H1

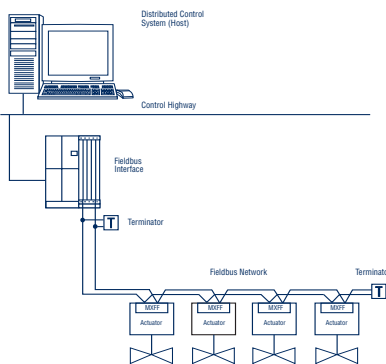


Limitorque’s Foundation Fieldbus H1 interface for MX actuators uses an all-digital, serial, two-way communications system to permit a truly field-distributed control system.

Standard Function Blocks for Analog Output (AO), Digital Output (DO), and Digital Input (DI) are used to easily integrate the MX actuator into the plant control system. These standard Function Blocks permit a seamless interface to control and monitor the MX actuator with other field instrumentation for increased visibility and control of the plant processes.

Other features of Foundation Fieldbus:

- Increased visibility of MX actuator status
- Reduced wiring and wire terminations
- Ease of configuration
- Open standard, non-proprietary fieldbus protocol

The MX FF unit may command its actuator to open, stop, close, move to a set position, or perform an emergency shutdown operation. Commands to the unit come over the network from the host system, which may be a Personal Computer (PC), Distributed Control System (DCS), Programmable Logic Controller (PLC), or some other microprocessor-based device. Commands may also be generated in another network actuator or device and transmitted over fieldbus using peer-to-peer, publisher/subscriber communication.



SMB Multi-turn Actuator

The eight models in the SMB-series range offer rugged dependability from the smaller SMB-000 through the industry's largest electric valve actuator, the SMB-5. An extensive selection of motors is available to suit various speed and voltage requirements. Optional controls include an integral reversing starter and control voltage transformer, a control station with pushbuttons for open/stop/close functions, position indicating lights, and Local/Off/Remote selector switch. The SMB is well suited to applications involving gate and globe valves, sluice gates, and other applications where long-term, uncompromised, reliable operation is critical. Fully qualified for use in nuclear power plants, the SMB is the recognized veteran of the nuclear power industry. The SB, a high-speed, high-temperature version of the SMB, is also available.

| Torque | | Thrust | | Output Speed |
|----------|-----------|-------------|---------|--------------|
| ft-lb | N m | lb. | kN | RPM |
| 91-60000 | 122-81350 | 8000-500000 | 36-2224 | 12-108 |



WTR Gearbox

The WTR-series worm gear operators are designed to operate butterfly, ball, and plug valves, or other devices requiring 90° operation. WTR units can be manually operated with a handwheel or wrench nut, or automated with an L120 and MX series electric actuator. The removable splined adapter simplifies alignment with the valve stem keyway for more convenient installation. A spur gear attachment or electric actuator can easily be added. The WTR operators are designed to perform in both Commercial and AWWA-service applications. Commercial-service units use ductile iron worm gears. AWWA-service units, built to meet AWWA C504-87 and C540-93 standards, use high-strength alloy bronze worm gears. Both Commercial and AWWA designs feature weatherproof construction with a built-in position indicator; buried or submersible units feature sealed housing covers and corrosion-resistant shafts. Weatherproof WTR units meet Nema 6 and IP67 standards; buried/submersible WTR operators are suitable for IP68 service.

| Torque | |
|------------|------------|
| ft-lb | N m |
| 1000-70000 | 1340-93846 |



B320 Bevel Gear Operator

Limitorque's B320-series worm gear operators excel in highly specialized applications. Whether controlled manually or automatically with either L120 or MX actuators, B320 operators are ideal for any multi-turn application requiring accurate, reliable performance. They are used with gate and globe valves, and sluice gates in power plants, petrochemical installations, pipelines, and water and waste treatment facilities. All units are fully weatherproofed, with gearing crafted from high-strength alloy steel for dependable operation with minimum backlash. They are also permanently lubricated and fully supported on anti-friction bearings.

| Torque | | Thrust | |
|-----------|-----------|--------------|---------|
| ft-lb | N m | lb. | kN |
| 300-12000 | 407-16270 | 15000-425000 | 67-1890 |



HBC Gearboxes

The HBC-series worm gear operators excel in highly specialized applications. Their rugged dependability has been proven in the nuclear power industry, large damper operations, and power plant flue gas desulphurization. Whether controlled manually with L120, MX, or SMB actuators, HBC's are ideal for any quarter-turn application requiring accurate, reliable, uncompromised performance. They are commonly used with butterfly, ball, and plug valves in power plants, petrochemical installations, pipelines, and water and waste treatment facilities. Units are fully weatherproof, and built to meet AWWA and buried services requirements.


| Torque | |
|-----------|------------|
| ft-lb | N m |
| 445-93000 | 603-126090 |

The latest valve control technology comes with full technical support

Limitorque's determination to make valve control easier is reflected in a comprehensive customer support program.

Support begins before the sale, when customers turn to Limitorque's experts for technical assistance in selecting the proper equipment. After the sale, Limitorque customers are backed by 200 factory-trained service technicians, stationed around the globe, who are available to assist with installation, commissioning, and maintenance.

Limitorque customers find their needs met by factories, stocking distributors, parts/service centers

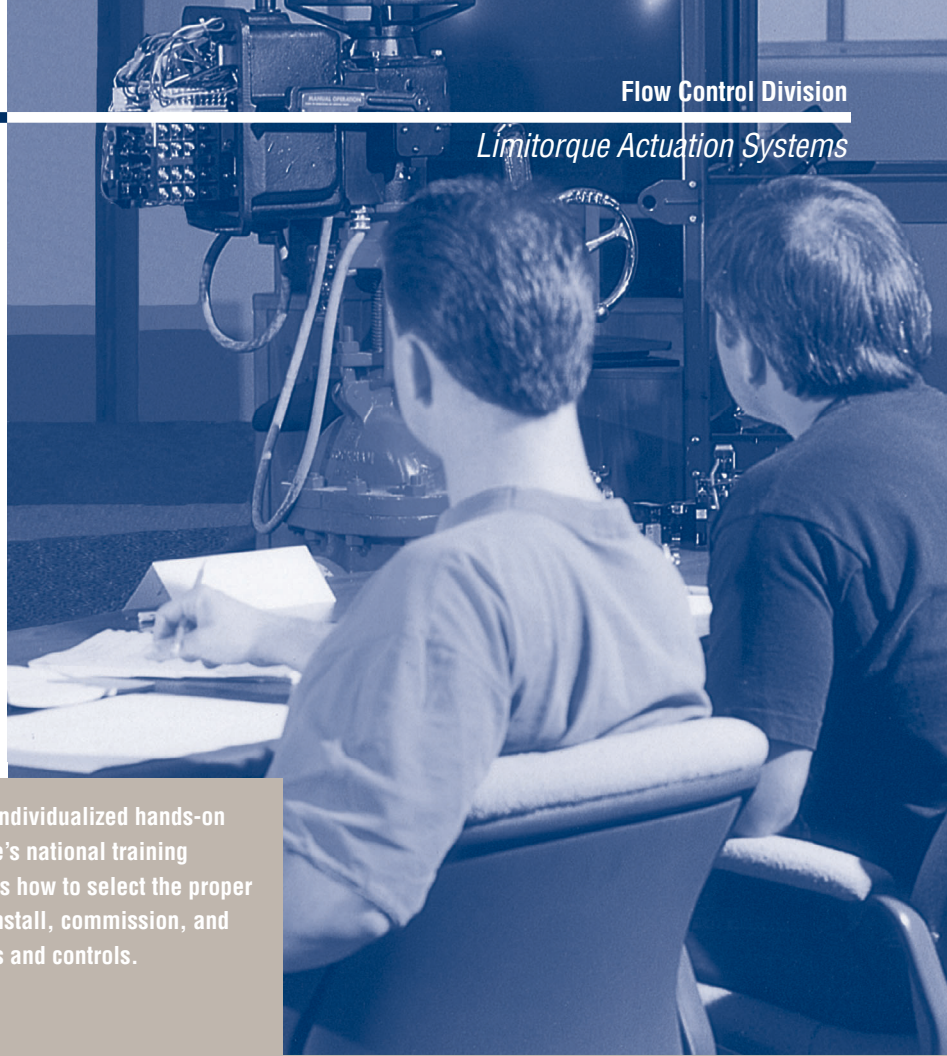

Customers can receive individualized hands-on instruction at Limitorque's national training facility. Training includes how to select the proper equipment and how to install, commission, and maintain valve actuators and controls.




Online documentation (from <http://www.limitorque.com>) includes sales brochures, specification bulletins, and installation and operation manuals.

and sales offices in more than 100 cities around the world. This global Limitorque network ensures that the end-user, engineer, contractor, or valve manufacturer can access Limitorque through a local office.

Internet technology also plays a part in our customer service support program. Using Limitorque's web site, customers can access key information around the clock, including product specifications and local service contacts. Customers can also use Limitorque's web site for downloading sales and technical literature from Limitorque's ever-growing library of detailed documentation.

To make valve control as easy as possible for operations personnel, Limitorque offers extensive training options for all major Limitorque products. Programs can be tailored to fit a customer's particular needs.

Customers worldwide rely on Limitorque's commitment to technical support.

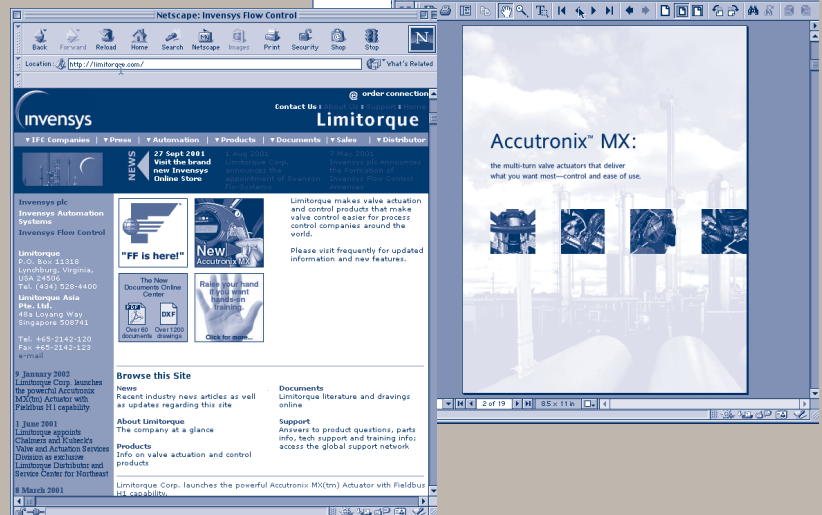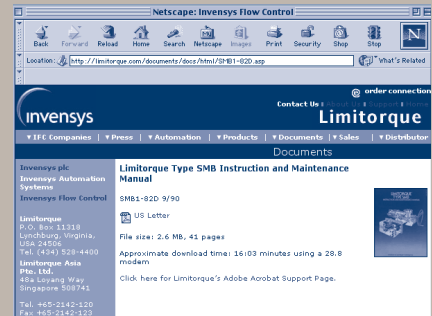

Limitorque
5114 Woodall Road,
P.O. Box 11318
Lynchburg, VA 24506-1318
Phone (434) 528-4400
Fax (434) 845-9736
<http://www.limitorque.com>

Limitorque
Abex Road
Newbury
Berkshire, RG14 5EY
England
Phone 44-1-635-46999
Fax 44-1-635-36034

Limitorque Nippon Gear Co., Ltd.
Asahi-Seimei Bldg. 4th Floor
1-11-11 Kita-Saiwai, Nishi-Ku
Yokohama-Shi, (220-0004)
Japan
Phone 81-45-326-2065
Fax 81-45-320-5962

Limitorque India, Ltd.
302, Mansarovar
90 Nehru Place
New Delhi - 110019
India
Phone 91-11-6431-748
Fax 91-11-6432-749

Flowserve Australia Pty Ltd.
14 Dalemore Drive
Scoresby, Victoria 3179
Australia
Phone 613-9729-2633
Fax 613-9729-2644

Limitorque Asia, Pte., Ltd.
12, Tuas Avenue 20
Singapore 638824
Phone 65-6868-4628
Fax 65-6862-4940



Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation and Maintenance (I & M) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

For more information about Flowserve Corporation, contact www.flowserve.com or call USA 1-800-225-6989.

FLOWSERVE CORPORATION
FLOW CONTROL DIVISION
Limitorque Actuation Systems
5114 Woodall Road
P.O. Box 11318
Lynchburg, VA 24506-1318
Phone: 434 528 4400
Facsimile: 434 845 9736
www.limitorque.com